

S-5!TM

The Right Way!

CORRU BRACKETTM




CorruBracketTM

CorruBracketTM can be used to mount virtually anything to corrugated metal roofing and is compatible with 7/8" and 3/4" corrugated roofing. No messy sealants to apply! No chance for leaks! The CorruBracketTM comes with factory-applied sealant already in the base for a water-tight attachment.

Installation is simple! CorruBracketTM is mounted directly into the supporting structure of the roof, i.e. wood decking, wood or steel purlins or trusses. No surface preparation is necessary; simply wipe away excess oils and debris, peel the release paper, align and apply. Secure through the pre-punched holes using the appropriate screws for the supporting structure.

CorruBracketTM is so strong, it will even support heavy-duty applications like snow retention. For corrugated profiles, the CorruBracketTM is the perfect match for our ColorGard[®] snow retention system. CorruBracketTM is economical and facilitates quick and easy installation.


You asked for it! We've got it! Now attach the strongest snow guard on the market, S-5!TM ColorGard[®] to face fastened metal roofing with the S-5!TM CorruBracketTM

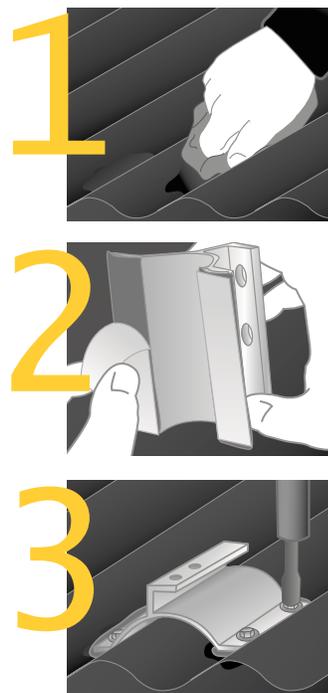

S-5-PV Kit (direct or rail)



ColorGard[®]

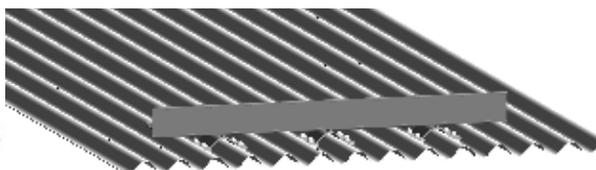


Example Uses

Attach almost **anything** to standing seam metal roofs without piercing the panel!

888-825-3432

www.S-5.com

CorruBracketTM

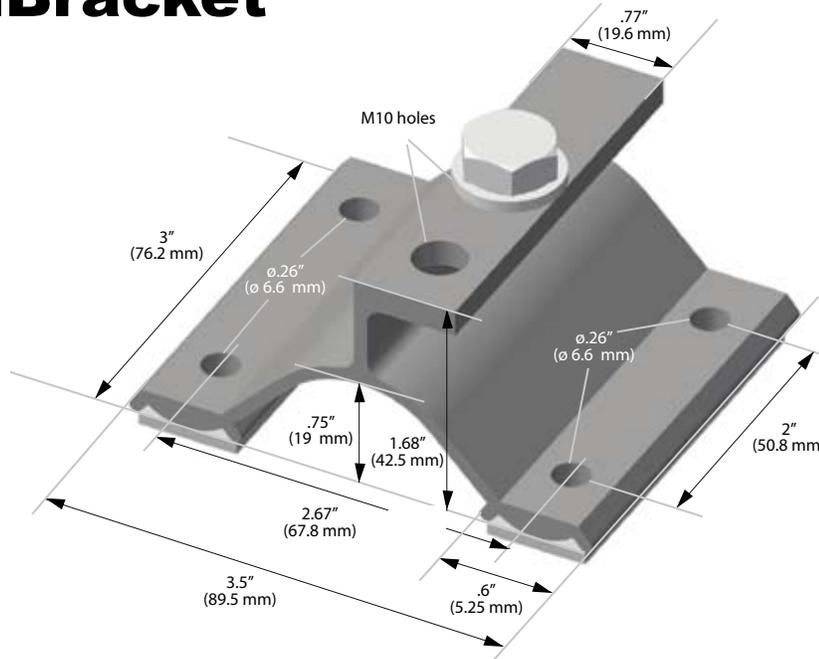


Part comes with M10 bolt and washer. Contact your distributor for information on other hole configurations.

Each CorruBracketTM comes with factory-applied butyl sealant in the base. CorruBracketTM is compatible with most common metal roofing materials. For design assistance, ask your distributor, or use our web-based calculator at www.S-5.com for job-specific system engineering and design of your next snow retention project. Also, please visit our website for more information including CAD details, metallurgical compatibilities and specifications.

The CorruBracketTM has been tested for load-to-failure results on wood decking, metal and wood purlins. The independent lab test data found at www.S-5.com can be used for load-critical designs and applications. S-5!TM holding strength is unmatched in the industry.

Example Profile

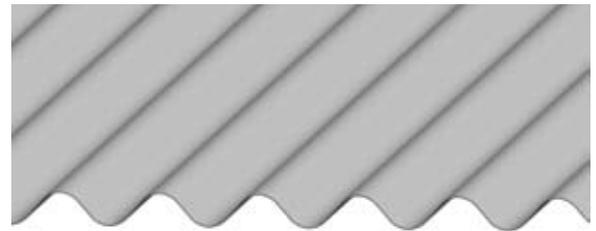

CorruBracketTM is extremely versatile. It can be used for virtually any attachment need on 7/8" and 3/4" corrugated metal roofing. No messy sealants to apply. The factory-applied butyl sealant waterproofs and makes installation a snap!



S-5!TM Warning! Please use this product responsibly!

Products are protected by multiple U.S. and foreign patents. For published data regarding holding strength, bolt torque, patents and trademarks visit the S-5!TM website at www.S-5.com.

Copyright 2009, Metal Roof Innovations, Ltd. S-5!TM products are patented by Metal Roof Innovations, Ltd.

Distributed by